


SHCO2829AABLZW 4" L/H GRAB BAR

SHCO2829AABRZW 4" R/H GRAB BAR

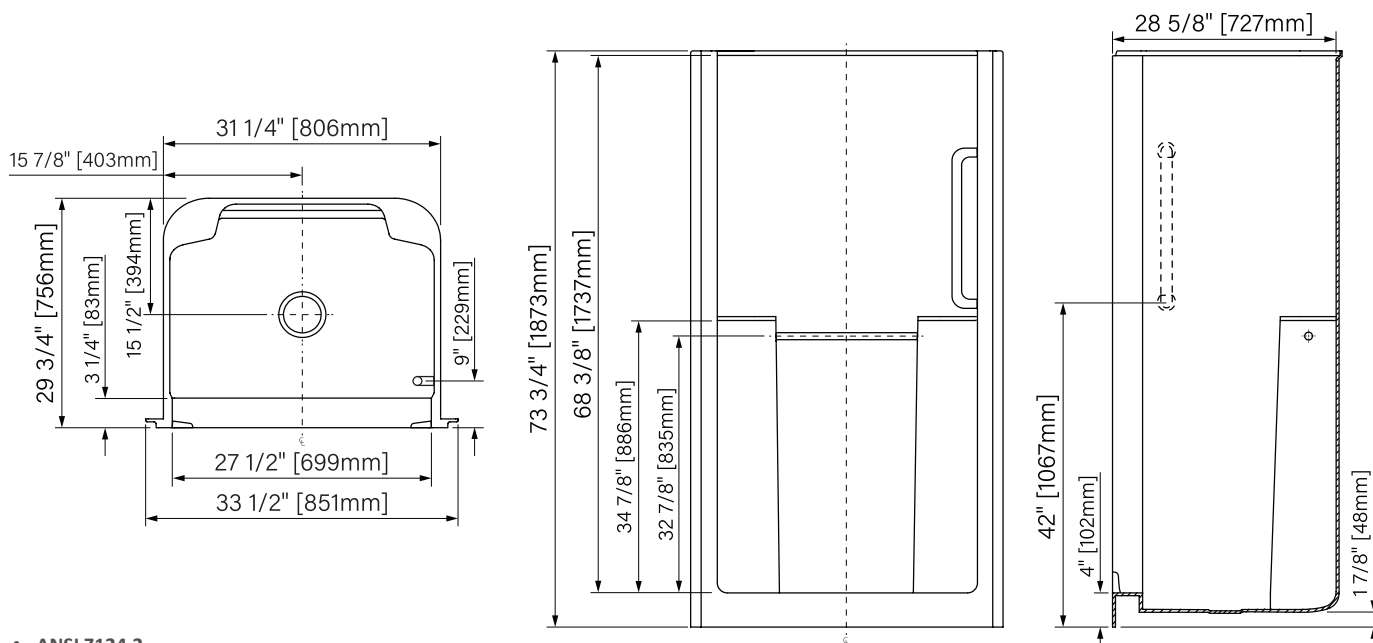

- ANSI Z124.2
- CSA B45.5 94 / B45-94
- ASTM E 84 / ULC S 102
- Meets requirements for Universal Plumbing Code administrated by: IAPMO, HUD, BOCA, and NAHB

• NOTE: Backing & bolts for fold-up seat may add up to 3/4" to overall dimensions.

STANDARD :

- Color : white
- 1 x Vertical / Straight 18" x 1 1/4" peened S.S. grab bar : **OOP212** (factory installed)
- 1 x S.S. towel bar (factory installed)
- 2 x Molded soap trays.
- **OD: 33 1/2" x 29 3/4" x 73 3/4" (851mm x 756mm x 1873mm)**

Note: Dimensions may vary within normal manufacturing tolerances +/- 1/4".

OPTIONS:

- | | |
|--|---|
| <input type="checkbox"/> HD White phenolic FUS 16" : OOP224 (factory installed) | <input type="checkbox"/> Straight 12" x 1 1/4" peened S.S. grab bar : OOP211 (factory installed) |
| <input type="checkbox"/> FUS conversion package : OOP169 (less seat) | <input type="checkbox"/> Straight 24" x 1 1/4" peened S.S. grab bar : OOP213 (factory installed) |
| <input type="checkbox"/> Anti-Bacterial shower curtain / hooks : OOP226 | <input type="checkbox"/> Straight 30" x 1 1/4" peened S.S. grab bar : OOP214 (factory installed) |
| <input type="checkbox"/> 1" S.S. curtain rod : OOP220 | <input type="checkbox"/> Straight 36" x 1 1/4" peened S.S. grab bar : OOP232 (factory installed) |
| <input type="checkbox"/> LED Dome light : OOP228 | <input type="checkbox"/> Straight 40" x 1 1/4" peened S.S. grab bar : OOP233 (factory installed) |
| <input type="checkbox"/> Pre-Drilled hole to fit OOP228 dome light : OOP320 | |
| <input type="checkbox"/> Brass shower drain : OOP304 | |
| <input type="checkbox"/> Forward Flange adapter (consult factory) : OOP408 | |

JOB:

Architect:

Modifications:

Plumber/Contractor:

Engineer:

Received and/or Approved by: