


ADA 3636 TRANSFER SHOWER

SHAD3636AASLTW-¾"R: VALVE ON RIGHT, SEAT ON LEFT

SHAD3636AASRTW-¾"L: VALVE ON LEFT, SEAT ON RIGHT

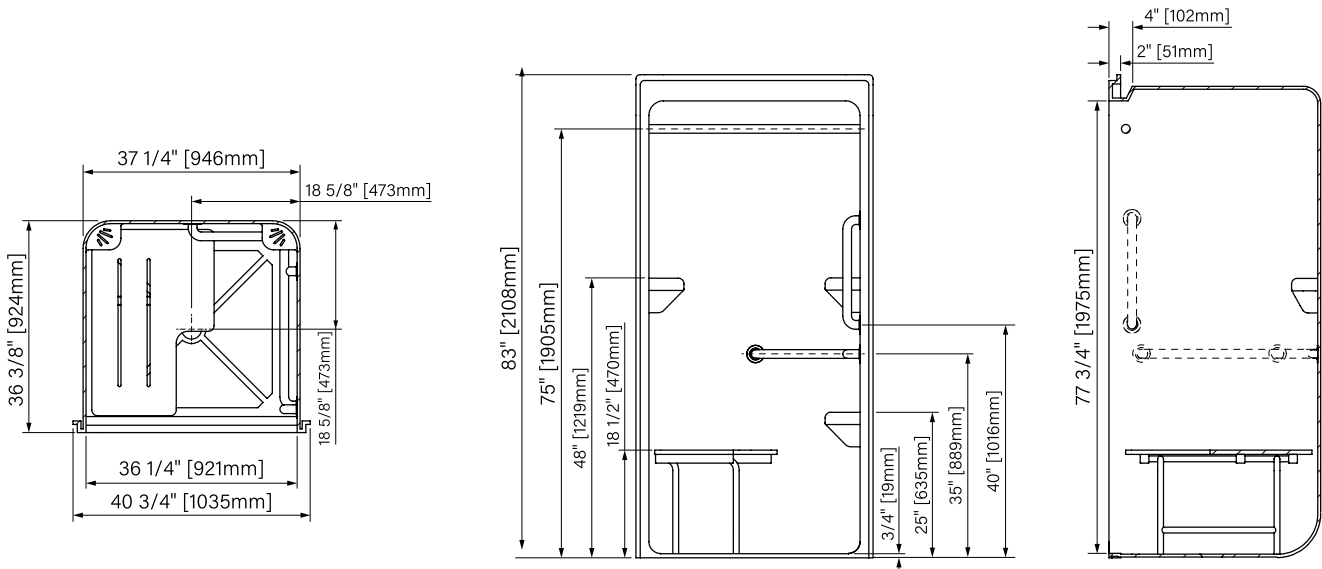

- ADA COMPLIANT
- ICC/ANSI 117.1/ANSI Z124.2
- CSA B45.5 94/B45-94
- ASTM E-84/ULC-S-102

- Meets requirements for Universal Plumbing Code administered by: IAPMO, HUD, BOCA, and NAHB.
- Available as ADA Compliant for Commonwealth of Massachusetts.

- NOTE: Backing & bolts for fold-up seat may add up to ¾" to overall dimensions.

Note: Dimensions may vary within normal manufacturing tolerances +/- ¼".

ARCHITECTURAL SPECIFICATION:

Shower Enclosure shall be an ADA compliant Acryline®, model number **SHAD3636-FUS-¾"** molded from a single sheet of acrylic resulting in no seams or joints. Unit shall have a ¾" or less threshold lip with anchoring tabs and encapsulated steel reinforcement for level floor installation. Enclosure shall be certified ANSI Z124.2 with a backside flame spread of less than 30.

* ID: 36¾" x 36" x 80½" (921mm x 914mm x 2045mm) * OD: 43¾" x 36¾" x 83" (1035mm x 924mm x 2108mm)

* Approximate weight 226 lbs.

- * Enclosure equipped standard with *HD white phenolic fold-up seat L/H **OOP184** * 3 integral molded soap trays
- * Enclosure equipped with factory installed S.S. peened grab bars. * 1 Half wrapped: 15¾" x 31¼" x 1¼" **OOP215**
- * 1 Vertical straight 18" x 1¼" **OOP212**
- * Grab bars to be installed with steel backing and shall be sealed to insure water tight integrity.
- * Unit shall have 5/8" receiving flange. * Self-caulking brass drain with S.S. strainer **OOP304**
- * 1" S.S. curtain rod **OOP220** (factory installed) * HD white phenolic fold-up seat R/H **OOP185**

State agencies and local authorities sometimes require specific code compliance regulations. Acryline®. ADA compliant units are based on the guidelines of the American with Disabilities Act. 1991. Any improper installation/field modifications could take the enclosure out of compliance. Acryline® accepts no responsibility for final code compliance.

OPTIONS:

- HD White padded FUS seat L/H : **OOP176 (Mass Code Requirement)**
- HD White padded FUS seat R/H : **OOP177 (Mass Code Requirement)**
- FUS conversion package : **OOP169 (less seat)**
- Anti-Bacterial shower curtain/hooks : **OOP226**
- Collapsible Water Retention Strip : **OOP310-36**
- Removable threshold : **OOP308-36**
- LED Dome light : **OOP228**
- Pre-Drilled hole to fit OOP228 dome light : **OOP320**
- Forward Flange adapter (consult factory) : **OOP408**

JOB:

Plumber/Contractor:

Architect:

Engineer:

Modifications:

Received and/or Approved by: